

Magnetglaze Extreme

a magnetic fixing system

Magnetglaze Extreme is a popular and easy to use system within the Easyfix[®] range, designed to accommodate larger or more draughty windows requiring thicker than standard sheet. It comprises two strips, both 25mm wide, one metal and the other magnetic. The metal strip is white faced and has self-adhesive foam tape on one side. This strip is placed on the window frame around the area to be glazed. The magnetic strip, which is also self-adhesive is placed around the edges of the plastic sheet. For smaller, lighter windows standard 13mm Magnetglaze is available - see our website www.secondarydiyglazing.com for details.

Magnetglaze Extreme is available in a 10m dispensing pack which makes it easy to handle and measure, or handy 5m kits.

All Magnetglaze systems are intended for internal use only and NOT recommended for use with glass. Always fit to the main frame and not to opening windows or roof lights.

ADD-ONS AVAILABLE - see secondarydiyglazing.com for details.

- make Magnetglaze Extreme into 2 or more panels with Magnetglaze Sash HD kits that use a specially designed jointing strip that maintains the thermal seal between panels. Please note that Sash kits are designed for 4mm plastic sheet only.

- hide the glazing sheet edges and the magnetic strip with an attractive Magnetglaze Finishing Trim - a 32mm wide, self-adhesive white or brown strip that is easy to mitre and install for a professional finish.

TOOLS REQUIRED - Tape measure, pencil and a strong pair of scissors.

Measuring up for your Plastic Sheeting

1. Measure the window and any frame up to the point where the inside edge of the steel strip will be placed on the window surround. This will give you a vertical (A) and a horizontal (B) measurement. Also ensure you have a minimum 30mm mounting surface on **each side** of your window.
2. Add 55mm to each measurement A & B. This will give you the size of the sheet you need to purchase.

Measuring up for your Magnetglaze Strip



3. You will require 2 lengths at measurement A plus 55mm and 2 lengths at measurement B for your window (do not add 55mm to measurement B). Add these together to find out how much Magnetglaze Extreme you will need.

USING MAGNETGLAZE STEP BY STEP

CAUTION - Care must be taken when handling the steel strip as the edges and trimmed corners can be sharp. This can cause paper cut injuries if not handled with a little care.

4. Now clean and degrease the window surround using a suitable cleaner, such as Easyfix[®] Surface Preparation Wipes for best adhesion results. These can be purchased from the website when you buy the Magnetglaze strip.
5. Begin by cutting and sticking the black magnetic strip to each edge of the plastic sheet.
6. Now hold the panel to the window frame so that it overlaps equally on each edge.
7. Draw a pencil line around the sheet on the frame.
8. Cut and fit the white metal strip to the window frame, sticking it just inside the pencil marks.
9. Offer up the glazing panel to the window and click into place. For best results, leave the panel off for 24 hours to give the adhesive tapes time to bond fully before putting them under stress.
10. Note that it is possible to paint over the steel strip in order to match your window decor. This will not reduce the magnetic grip but will improve the look of the window when the panel is removed.

It is always best to remove double glazing in summer to allow ventilation.

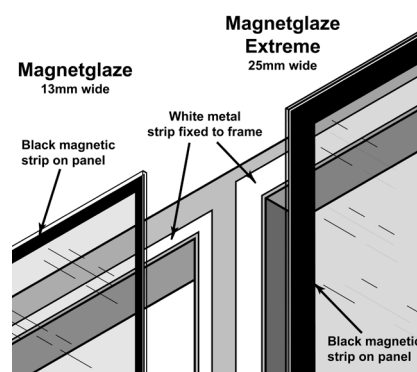

PLEASE READ INSTRUCTIONS THOROUGHLY BEFORE CUTTING OR FITTING ANY SYSTEM

If you would like to share a picture of your installation then please email it to sales@secondarydiyglazing.com

TUBEWAY (SALES) LIMITED, Elton Park, Hadleigh Road, Ipswich, IP2 0HN. Tel: 01473 261126
Buy online at www.secondarydiyglazing.com email: sales@tubeway.co.uk website: www.tubewaysales.com

EASYFIX[®] is a Registered Trademark of Tubeway (Sales) Limited - Apr2023